

S-ZP SERIES

Vacuum suction cup with snap ring (ø9 ~ ø50) With adaptor and buffer

How to order

「With adapter & Buffer」



S-ZP **T** **10** **U** **N** **J** **10** - **B5** - **A8**

① Vacuum port direction
② Diameter
③ Suction type
④ Material
⑤ Buffer type
⑥ Buffer stroke
⑦ Connection of vacuum port
⑧ Mounting thread

④ Material □	
N	NBR
S	Silicone

⑤ Buffer type ●	
J	Rotative
K	Unable to rotate

③ Suction Type ☆	② Diameter (mm) ○	E				F				G				
		09 ø9	10 ø10	13 ø13	14 ø14	16 ø16	20 ø20	25 ø25	30 ø30	32 ø32	40 ø40	50 ø50		
U Flat		-	●	●	-	●	●	-	●	●	●	●		
C With Rib		-	●	●	-	●	●	-	●	●	●	●		
D Deep		-	●	-	-	●	-	-	-	-	●	-		
B 2 Bellows		-	●	●	-	●	●	-	●	●	●	●		
J 3/4 Bellows		●	-	-	●	●	-	●	●	-	-	-		
⑥ Buffer stroke	10 10 mm			●				●			●			
	20 20 mm			●				●			●			
	30 30 mm			●				●			●			
	40 40 mm			●				●			●			
	50 50 mm			●				●			●			
⑦ Connection of vacuum port	T Vertical	Internal thread	B5 M5 x 0.8		●			●			●			
			B01 Rc1/8		-			-			-	●		
			Barb fitting	U4 ø4 PU hose		●			-			-	-	
		N4 ø4 Nylon hose		●			-			-	-	-		
		U6 ø6 PU hose		●			-			●		●		
		N6 ø6 Nylon hose		●			-			●		●		
	R Lateral	Outer hexagon quick connector	03 ø3		●			-			-	-		
			23 ø3.2		●			-			-	-		
			04 ø4		●			-			●		-	
		Inner	06 ø6		●			-			●		●	
			04 ø4		●			-			●		-	
			06 ø6		●			-			●		●	
Y Lateral	Outer hexagon quick connector	04 ø4		●			-			●		-		
		06 ø6		●			-			●		●		
		08 ø8		-			-			●		●		
	Inner	B5 M5 x 0.8		●			-			●		●		
		U4 ø4 PU hose		●			-			●		-		
		N4 ø4 Nylon hose		●			-			●		-		
⑧ Mounting Thread	Quick connector	U6 ø6 PU hose		●			-			●		●		
		N6 ø6 Nylon hose		●			-			●		●		
		03 ø3		●			-			-		-		
	Inner	23 ø3.2		●			-			-		-		
		04 ø4		●			-			●		-		
		06 ø6		●			-			●		●		
Outer hexagon quick connector	03S ø3		●			-			-		-			
	23S ø3.2		●			-			-		-			
	04S ø4		●			-			●		-			
Outer hexagon quick connector	06S ø6		●			-			●		●			
	A10 M10 x 1.0		●			-			●		-			
	A14 M14 x 1.0		-			-			●		●			

Mounting Thread	Mounting Nut Tightening Torque (N.m)	Spring Buffer Force (N)	
		0 Stroke	Full Stroke
M10 x 1.0	2.5-3.5	1.0	3.0
M14 x 1.0	6.5-7.5	2.0	5.0

S-ZP SERIES

Vacuum suction cup with snap ring U, C (ø10 ~ ø16) With adaptor

Dimensions

(mm)

Vacuum suction cup with snap ring U.C									
S-ZPT Vertical vacuum port with male thread A5,A6,A01					S-ZPT Vertical vacuum port with female thread B5,B6,B01				
A5,A6 A01					B5,B6 B01				
Model	A	B	C	L	Pad diameter			Adaptor Model	
					10	13	16		
S-ZPT ○ ☆ □ -A5	M5x0.8	7	4	26				ZPT2-A5	
S-ZPT ○ ☆ □ -A6	M6x1.0	8	3	31	12	12	12.5	ZPT2-A6	
S-ZPT ○ ☆ □ -A01	-	-	-	-				ZPT2-A01	
○ Symbol of pad diameter:10,13,16 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)					○ Symbol of pad diameter:10,13,16 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)				
S-ZPR Lateral vacuum port with female thread A5,A6					S-ZPR Lateral vacuum port with female thread B5,B6				
A5,A6					B5,B6				
Model	A	D	E	L	Pad diameter			Adaptor Model	
					10	13	16		
S-ZPR ○ ☆ □ -A5	M5x0.8	4	7	55				ZPR2-◇-A5	
S-ZPR ○ ☆ □ -A6	M6x1.0	3	8	60	12	12	12.5	ZPR2-◇-A6	
○ Symbol of pad diameter:10,13,16 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S) ◇ Vacuum port connection:04,06					○ Symbol of pad diameter:10,13,16 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S) ◇ Vacuum port connection:04,06				
S-ZPY Lateral vacuum port with female thread A5,A6					S-ZPY Lateral vacuum port with female thread B5,B6				
A5,A6					B5,B6				
Can be combined with connector accessories Q Connector accessories (a3) M5 ◇ U4,N4,U6,N6 Q Connector accessories (a5) M5 ◇ 03,23,04,06 Q Connector accessories (a6) M5 ◇ 03S,23S,04S,06S Model : S-ZPY ○ ☆ □ -A 5 6					Can be combined with connector accessories Q Connector accessories (a3) M5 ◇ U4,N4,U6,N6 Q Connector accessories (a5) M5 ◇ 03,23,04,06 Q Connector accessories (a6) M5 ◇ 03S,23S,04S,06S Model : S-ZPY ○ ☆ □ -B 5 6				
Model	A	B	C	L	Pad diameter			Adaptor Model	
					10	13	16		
S-ZPY ○ ☆ □ -B5-A5	M5x0.8	7	4	47				ZPY2-B5-A5	
S-ZPY ○ ☆ □ -B5-A6	M6x1.0	8	3	52	12	12	12.5	ZPY2-B5-A6	
○ Symbol of pad diameter:10,13,16 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)					○ Symbol of pad diameter:10,13,16 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)				

S-ZP SERIES

Vacuum suction cup with snap ring U, C (ø10 ~ ø16) With adaptor

Dimensions


(mm)

Vacuum pad with lock ring U.C

S-ZPT **Vertical vacuum port buffer** 10,20,30,40,50


Rotative type:

S-ZPT ○ ☆ □ J ■ -B5-A10





Unable to rotate type:

S-ZPT ○ ☆ □ K ■ -B5-A10





Can be combined with connector accessories



Model: S-ZPT ○ ☆ □ ■ -A10

N4, U4

N6, U6




Model: S-ZPT ○ ☆ □ ■ -A10
N4
U4
N6
U6

Model	B	C	L	Pad Diameter			P	(m1) + (i2) Bumper Support Model
				10	13	16		
S-ZPT ○ ☆ □ J10-B5-A10	10	23	47					ZPT2-J10-B5-A10
S-ZPT ○ ☆ □ J20-B5-A10	20	51	85					ZPT2-J20-B5-A10
S-ZPT ○ ☆ □ J30-B5-A10	30		95	12	12	12.5		ZPT2-J30-B5-A10
S-ZPT ○ ☆ □ J40-B5-A10	40		131					ZPT2-J40-B5-A10
S-ZPT ○ ☆ □ J50-B5-A10	50	77	141					ZPT3-J50-B5-A10

Model	B	C	L	Pad Diameter			P	(m1) + (i2) Bumper Support Model
				10	13	16		
S-ZPT ○ ☆ □ K10-B5-A10	10	23	47					ZPT2-K10-B5-A10
S-ZPT ○ ☆ □ K20-B5-A10	20		85					ZPT2-K20-B5-A10
S-ZPT ○ ☆ □ K30-B5-A10	30	51	95	12	12	12.5		ZPT2-K30-B5-A10
S-ZPT ○ ☆ □ K40-B5-A10	40		131					ZPT2-K40-B5-A10
S-ZPT ○ ☆ □ K50-B5-A10	50	77	141					ZPT3-K50-B5-A10

○ Symbol of pad diameter: 10, 13, 16 □ Material: NBR(N), Silicone(S) ■ Buffer stroke(mm): 10, 20, 30, 40, 50
☆ Pad type: Flat(U), with ribs(C) ● Height compensator type: Rotative(J), Unable to rotate(K)


S-ZPR **Lateral vacuum port buffer** 10,20,30,40,50

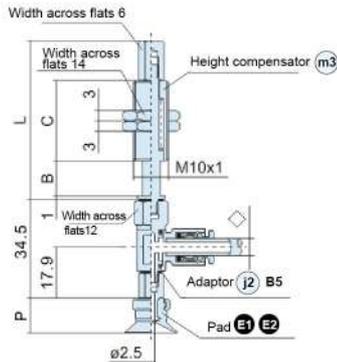

Model	B	C	L	Pad Diameter			P	(m3) + (j2) Bumper Support Model
				10	13	16		
S-ZPR ○ ☆ □ ● 10-◇-A10	10	23	45					ZPR2-●10-◇-A10
S-ZPR ○ ☆ □ ● 20-◇-A10	20	51	83					ZPR2-●20-◇-A10
S-ZPR ○ ☆ □ ● 30-◇-A10	30		93	12	12	12.5		ZPR2-●30-◇-A10
S-ZPR ○ ☆ □ ● 40-◇-A10	40		129					ZPR2-●40-◇-A10
S-ZPR ○ ☆ □ ● 50-◇-A10	50	77	139					ZPR2-●50-◇-A10

○ Symbol of pad diameter: 10, 13, 16 □ Material: NBR(N), Silicone(S)
☆ Pad type: Flat(U), with ribs(C) ● Height compensator type: Rotative(J), Unable to rotate(K)
◇ Vacuum port connection: 04, 06




S-ZPY **Lateral vacuum port buffer** 10,20,30,40,50



Model	B	C	L	Pad Diameter			P	(m3) + (j2) Bumper Support Model
				10	13	16		
S-ZPY ○ ☆ □ ● 10-B5-A10	10	23	45					ZPY2-●10-B5-A10
S-ZPY ○ ☆ □ ● 20-B5-A10	20		83					ZPY2-●20-B5-A10
S-ZPY ○ ☆ □ ● 30-B5-A10	30	51	93	12	12	12.5		ZPY2-●30-B5-A10
S-ZPY ○ ☆ □ ● 40-B5-A10	40		129					ZPY2-●40-B5-A10
S-ZPY ○ ☆ □ ● 50-B5-A10	50	77	139					ZPY2-●50-B5-A10

○ Symbol of pad diameter: 10, 13, 16 □ Material: NBR(N), Silicone(S)
☆ Pad type: Flat(U), with ribs(C) ● Height compensator type: Rotative(J), Unable to rotate(K)
■ Buffer stroke(mm): 10, 20, 30, 40, 50

Can be combined with connector accessories















Model: S-ZPY ○ ☆ □ ■ -◇-A10

S-ZP SERIES

Vacuum pad with lock ring U, C (ø20 ~ ø32) With adaptor

Dimensions

(mm)


Vacuum pad with lock ring U.C													
S-ZPT Vertical vacuum port with male thread		A6,A8,A01								S-ZPT Vertical vacuum port with female thread		B5,B6,B8,B01	
A6,A8		A01								B5,B6		B8,B01	
													
Model	A	B	C	D	L	Pad diameter			Adaptor Model				
						20	25	32					
S-ZPT ○ ☆ □ -A6	M6x1.0	5	8	8	31				ZPT3-A6				
S-ZPT ○ ☆ □ -A8	M8x1.0	10	12	12	26	14	14	14.5	ZPT3-A8				
S-ZPT ○ ☆ □ -A01	-	-	-	-	-				ZPT3-A01				
○ Symbol of pad diameter: 20,25,32 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)													
S-ZPR Lateral vacuum port with female thread		A6,A8								S-ZPR Lateral vacuum port with female thread		B5,B6,B8	
													
Model	A	E	L	Pad diameter			Adaptor Model						
				20	25	32							
S-ZPR ○ ☆ □ -A6	M6x1.0	8	69.5				ZPR3-◇-A6						
S-ZPR ○ ☆ □ -A8	M8x1.0	12	59.5	14	14	14.5	ZPR3-◇-A8						
○ Symbol of pad diameter: 20,25,32 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 04,06,08													
S-ZPY Lateral vacuum port with female thread		A6,A8		Can be combined with connector accessories						S-ZPY Lateral vacuum port with female thread		B5,B6,B8	
													
Model	A	B	L	Pad diameter			Adaptor Model						
				20	25	32							
S-ZPY ○ ☆ □ -B5-A6	M6x1.0	8	54				ZPY3-B5-A6						
S-ZPY ○ ☆ □ -B5-A8	M8x1.0	12	44	14	14	14.5	ZPY3-B5-A8						
○ Symbol of pad diameter: 20,25,32 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)													
S-ZPY Lateral vacuum port with female thread		A6,A8		Can be combined with connector accessories						S-ZPY Lateral vacuum port with female thread		B5,B6,B8	
													
Model	A	B	L	Pad diameter			Adaptor Model						
				20	25	32							
S-ZPY ○ ☆ □ -B5-B5	M5x0.8	5					ZPY3-B5-B5						
S-ZPY ○ ☆ □ -B5-B6	M6x1.0	6		14	14	14.5	ZPY3-B5-B6						
S-ZPY ○ ☆ □ -B5-B8	M8x1.25	8					ZPY3-B5-B8						
○ Symbol of pad diameter: 20,25,32 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)													

Dimensions


(mm)

Vacuum pad with lock ring U.C


S-ZPT Vertical vacuum port buffer 10,20,30 40,50 **A10**



Can be combined with connector accessories



Model: S-ZPT ○ ☆ □ ● ■ - ◇ - A10




Model: S-ZPT ○ ☆ □ ● ■ - ◇ - A10


Model	B	C	L	Pad Diameter			P	Bumper Support Model
				20	25	32		
S-ZPT ○ ☆ □ ● 10-B5-A10	10	23	47					ZPT3-●10-B5-A10
S-ZPT ○ ☆ □ ● 20-B5-A10	20	51	85					ZPT3-●20-B5-A10
S-ZPT ○ ☆ □ ● 30-B5-A10	30	77	95	14	14	14.5		ZPT3-●30-B5-A10
S-ZPT ○ ☆ □ ● 40-B5-A10	40		131					ZPT3-●40-B5-A10
S-ZPT ○ ☆ □ ● 50-B5-A10	50		141					ZPT3-●50-B5-A10

- Symbol of pad diameter: 20,25,32
- ☆ Pad type: Flat(U), with ribs(C)
- Buffer stroke(mm): 10,20,30,40,50
- Material: NBR(N),Silicone(S)
- Height compensator type:Rotative(J)
- Unable to rotate(K)


S-ZPT Vertical vacuum port buffer 10,20 30,50 **A14**



Can be combined with connector accessories



Model: S-ZPT ○ ☆ □ ● ■ - ◇ - A14




Model: S-ZPT ○ ☆ □ ● ■ - ◇ - A14


Model	B	C	L	Pad Diameter			P	Bumper Support Model
				20	25	32		
S-ZPT ○ ☆ □ ● 10-B5-A14	10		77					ZPT3-●10-B5-A14
S-ZPT ○ ☆ □ ● 20-B5-A14	20	50	81					ZPT3-●20-B5-A14
S-ZPT ○ ☆ □ ● 30-B5-A14	30		91					ZPT3-●30-B5-A14
S-ZPT ○ ☆ □ ● 50-B5-A14	50	75	136					ZPT3-●50-B5-A14
S-ZPT ○ ☆ □ ● 10-B01-A14	10		78.5					ZPT3-●10-B01-A14
S-ZPT ○ ☆ □ ● 20-B01-A14	20	50	84					ZPT3-●20-B01-A14
S-ZPT ○ ☆ □ ● 30-B01-A14	30		94					ZPT3-●30-B01-A14
S-ZPT ○ ☆ □ ● 50-B01-A14	50	75	139					ZPT3-●50-B01-A14

- Symbol of pad diameter: 20,25,32
- ☆ Pad type: Flat(U), with ribs(C)
- Buffer stroke(mm): 10,20,30,50
- Material: NBR(N),Silicone(S)
- Height compensator type:Rotative(J)
- Unable to rotate(K)

S-ZPR Lateral vacuum port buffer 10,20,30 40,50 **A10**

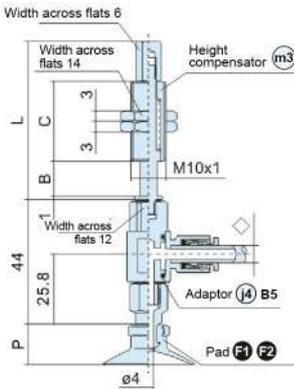

Special combination




Model: S-ZPR ○ ☆ □ ● ■ - ◇ - A14


Model	B	C	L	Pad Diameter			P	Bumper Support Model
				20	25	32		
S-ZPR ○ ☆ □ ● 10-◇-A10	10	23	45					ZPR3-●10-◇-A10
S-ZPR ○ ☆ □ ● 20-◇-A10	20	51	83					ZPR3-●20-◇-A10
S-ZPR ○ ☆ □ ● 30-◇-A10	30	77	93	14	14	14.5		ZPR3-●30-◇-A10
S-ZPR ○ ☆ □ ● 40-◇-A10	40		129					ZPR3-●40-◇-A10
S-ZPR ○ ☆ □ ● 50-◇-A10	50		139					ZPR3-●50-◇-A10

- Symbol of pad diameter: 20,25,32
- ☆ Pad type: Flat(U), with ribs(C)
- ◇ Vacuum port connection: 04,06,08
- Material: NBR(N),Silicone(S)
- Height compensator type:Rotative(J)
- Unable to rotate(K)


S-ZPY Lateral vacuum port buffer 10,20,30 40,50



Can be combined with connector accessories



Model: S-ZPY ○ ☆ □ ● ■ - ◇ - A10



Model: S-ZPY ○ ☆ □ ● ■ - ◇ - A14

Model	B	C	L	Pad Diameter			P	Bumper Support Model
				20	25	32		
S-ZPY ○ ☆ □ ● 10-B5-A10	10	23	45					ZPY3-●10-B5-A10
S-ZPY ○ ☆ □ ● 20-B5-A10	20	51	83					ZPY3-●20-B5-A10
S-ZPY ○ ☆ □ ● 30-B5-A10	30	77	93	14	14	14.5		ZPY3-●30-B5-A10
S-ZPY ○ ☆ □ ● 40-B5-A10	40		129					ZPY3-●40-B5-A10
S-ZPY ○ ☆ □ ● 50-B5-A10	50		139					ZPY3-●50-B5-A10

- Symbol of pad diameter: 20,25,32
- ☆ Pad type: Flat(U), with ribs(C)
- Buffer stroke(mm): 10,20,30,50
- Material: NBR(N),Silicone(S)
- Height compensator type:Rotative(J)
- Unable to rotate(K)

S-ZP SERIES

Vacuum pad with lock ring U, C (ø40, ø50) With adaptor

Dimensions

(mm)

Vacuum pad with lock ring U.C																																																																									
S-ZPT Vertical vacuum port with male thread A6,A8,A01					S-ZPT Vertical vacuum port with female thread B6,B8,B01																																																																				
<table border="1"> <thead> <tr> <th rowspan="2">Model</th> <th rowspan="2">A</th> <th rowspan="2">øB</th> <th rowspan="2">C</th> <th rowspan="2">L</th> <th colspan="2">Pad Diameter</th> <th rowspan="2">P</th> <th rowspan="2">Adaptor Model</th> </tr> <tr> <th>40</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>S-ZPT ○ ☆ □ -A6</td> <td>M6x1.0</td> <td>3.5</td> <td>8</td> <td>32</td> <td rowspan="3">18.5</td> <td rowspan="3">19.5</td> <td rowspan="3"></td> <td>ZPT4-A6</td> </tr> <tr> <td>S-ZPT ○ ☆ □ -A8</td> <td>M8x1.0</td> <td>4.5</td> <td>12</td> <td>22</td> <td>ZPT4-A8</td> </tr> <tr> <td>S-ZPT ○ ☆ □ -A01</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>ZPT4-A01</td> </tr> </tbody> </table>					Model	A	øB	C	L	Pad Diameter		P	Adaptor Model	40	50	S-ZPT ○ ☆ □ -A6	M6x1.0	3.5	8	32	18.5	19.5		ZPT4-A6	S-ZPT ○ ☆ □ -A8	M8x1.0	4.5	12	22	ZPT4-A8	S-ZPT ○ ☆ □ -A01	-	-	-	-	ZPT4-A01	<table border="1"> <thead> <tr> <th rowspan="2">Model</th> <th rowspan="2">A</th> <th rowspan="2">B</th> <th rowspan="2">øC</th> <th rowspan="2">L</th> <th colspan="2">Pad Diameter</th> <th rowspan="2">P</th> <th rowspan="2">Adaptor Model</th> </tr> <tr> <th>40</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>S-ZPT ○ ☆ □ -B6</td> <td>M6x1.0</td> <td>6</td> <td>4.5</td> <td>32</td> <td rowspan="3">18.5</td> <td rowspan="3">19.5</td> <td rowspan="3"></td> <td>ZPT4-B6</td> </tr> <tr> <td>S-ZPT ○ ☆ □ -B8</td> <td>M8x1.25</td> <td>8</td> <td>6.8</td> <td>22</td> <td>ZPT4-B8</td> </tr> <tr> <td>S-ZPT ○ ☆ □ -B01</td> <td>Rc1/8</td> <td>6.2</td> <td></td> <td></td> <td>ZPT4-B01</td> </tr> </tbody> </table>					Model	A	B	øC	L	Pad Diameter		P	Adaptor Model	40	50	S-ZPT ○ ☆ □ -B6	M6x1.0	6	4.5	32	18.5	19.5		ZPT4-B6	S-ZPT ○ ☆ □ -B8	M8x1.25	8	6.8	22	ZPT4-B8	S-ZPT ○ ☆ □ -B01	Rc1/8	6.2			ZPT4-B01
Model	A	øB	C	L						Pad Diameter				P	Adaptor Model																																																										
					40	50																																																																			
S-ZPT ○ ☆ □ -A6	M6x1.0	3.5	8	32	18.5	19.5		ZPT4-A6																																																																	
S-ZPT ○ ☆ □ -A8	M8x1.0	4.5	12	22				ZPT4-A8																																																																	
S-ZPT ○ ☆ □ -A01	-	-	-	-				ZPT4-A01																																																																	
Model	A	B	øC	L	Pad Diameter		P	Adaptor Model																																																																	
					40	50																																																																			
S-ZPT ○ ☆ □ -B6	M6x1.0	6	4.5	32	18.5	19.5		ZPT4-B6																																																																	
S-ZPT ○ ☆ □ -B8	M8x1.25	8	6.8	22				ZPT4-B8																																																																	
S-ZPT ○ ☆ □ -B01	Rc1/8	6.2						ZPT4-B01																																																																	
<p>○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)</p>					<p>○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)</p>																																																																				
S-ZPR Lateral vacuum port with female thread A6,A8					S-ZPR Lateral vacuum port with female thread B6,B8																																																																				
<table border="1"> <thead> <tr> <th rowspan="2">Model</th> <th rowspan="2">A</th> <th rowspan="2">E</th> <th rowspan="2">L</th> <th colspan="2">Pad Diameter</th> <th rowspan="2">P</th> <th rowspan="2">Adaptor Model</th> </tr> <tr> <th>40</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>S-ZPR ○ ☆ □ -◇-A6</td> <td>M6x1.0</td> <td>8</td> <td>68</td> <td rowspan="3">18.5</td> <td rowspan="3">19.5</td> <td rowspan="3"></td> <td>ZPR4-◇-A6</td> </tr> <tr> <td>S-ZPR ○ ☆ □ -◇-A8</td> <td>M8x1.0</td> <td>12</td> <td>58</td> <td>ZPR4-◇-A8</td> </tr> </tbody> </table>					Model	A	E	L	Pad Diameter		P	Adaptor Model	40	50	S-ZPR ○ ☆ □ -◇-A6	M6x1.0	8	68	18.5	19.5		ZPR4-◇-A6	S-ZPR ○ ☆ □ -◇-A8	M8x1.0	12	58	ZPR4-◇-A8	<table border="1"> <thead> <tr> <th rowspan="2">Model</th> <th rowspan="2">A</th> <th rowspan="2">D</th> <th colspan="2">Pad Diameter</th> <th rowspan="2">P</th> <th rowspan="2">Adaptor Model</th> </tr> <tr> <th>40</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>S-ZPR ○ ☆ □ -◇-B6</td> <td>M6x1.0</td> <td>6</td> <td rowspan="3">18.5</td> <td rowspan="3">19.5</td> <td rowspan="3"></td> <td>ZPR4-◇-B6</td> </tr> <tr> <td>S-ZPR ○ ☆ □ -◇-B8</td> <td>M8x1.25</td> <td>8</td> <td>ZPR4-◇-B8</td> </tr> </tbody> </table>					Model	A	D	Pad Diameter		P	Adaptor Model	40	50	S-ZPR ○ ☆ □ -◇-B6	M6x1.0	6	18.5	19.5		ZPR4-◇-B6	S-ZPR ○ ☆ □ -◇-B8	M8x1.25	8	ZPR4-◇-B8																					
Model	A	E	L	Pad Diameter					P	Adaptor Model																																																															
				40	50																																																																				
S-ZPR ○ ☆ □ -◇-A6	M6x1.0	8	68	18.5	19.5		ZPR4-◇-A6																																																																		
S-ZPR ○ ☆ □ -◇-A8	M8x1.0	12	58				ZPR4-◇-A8																																																																		
Model	A	D	Pad Diameter				P	Adaptor Model																																																																	
			40	50																																																																					
S-ZPR ○ ☆ □ -◇-B6	M6x1.0	6	18.5	19.5		ZPR4-◇-B6																																																																			
S-ZPR ○ ☆ □ -◇-B8	M8x1.25	8				ZPR4-◇-B8																																																																			
<p>○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 06,08</p>						<p>○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 06,08</p>																																																																			
S-ZPY Lateral vacuum port with female thread A6,A8					S-ZPY Lateral vacuum port with female thread B6,B8																																																																				
<p>Can be combined with connector accessories</p> <p>Q Connector accessories (a3) M5 ◇ U6,N6</p> <p>Q Connector accessories (a5) M5 ◇ 06</p> <p>Q Connector accessories (a6) M5 ◇ 06S</p> <p>Model: S-ZPY ○ ☆ □ -◇-A₆⁸</p>					<p>Can be combined with connector accessories</p> <p>Q Connector accessories (a3) M5 ◇ U6,N6</p> <p>Q Connector accessories (a5) M5 ◇ 06</p> <p>Q Connector accessories (a6) M5 ◇ 06S</p> <p>Model: S-ZPY ○ ☆ □ -◇-B₆⁸</p>																																																																				
<table border="1"> <thead> <tr> <th rowspan="2">Model</th> <th rowspan="2">A</th> <th rowspan="2">B</th> <th rowspan="2">L</th> <th colspan="2">Pad Diameter</th> <th rowspan="2">P</th> <th rowspan="2">Adaptor Model</th> </tr> <tr> <th>40</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>S-ZPY ○ ☆ □ -B5-A6</td> <td>M6x1.0</td> <td>8</td> <td>54</td> <td rowspan="2">18.5</td> <td rowspan="2">19.5</td> <td rowspan="2"></td> <td>ZPY4-B5-A6</td> </tr> <tr> <td>S-ZPY ○ ☆ □ -B5-A8</td> <td>M8x1.0</td> <td>12</td> <td>44</td> <td>ZPY4-B5-A8</td> </tr> </tbody> </table>					Model	A	B	L	Pad Diameter		P	Adaptor Model	40	50	S-ZPY ○ ☆ □ -B5-A6	M6x1.0	8	54	18.5	19.5		ZPY4-B5-A6	S-ZPY ○ ☆ □ -B5-A8	M8x1.0	12	44	ZPY4-B5-A8	<table border="1"> <thead> <tr> <th rowspan="2">Model</th> <th rowspan="2">A</th> <th rowspan="2">B</th> <th colspan="2">Pad Diameter</th> <th rowspan="2">P</th> <th rowspan="2">Adaptor Model</th> </tr> <tr> <th>40</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>S-ZPY ○ ☆ □ -B5-B6</td> <td>M6x1.0</td> <td>6</td> <td rowspan="3">18.5</td> <td rowspan="3">19.5</td> <td rowspan="3"></td> <td>ZPY3-B5-B6</td> </tr> <tr> <td>S-ZPY ○ ☆ □ -B5-B8</td> <td>M8x1.25</td> <td>8</td> <td>ZPY3-B5-B8</td> </tr> </tbody> </table>					Model	A	B	Pad Diameter		P	Adaptor Model	40	50	S-ZPY ○ ☆ □ -B5-B6	M6x1.0	6	18.5	19.5		ZPY3-B5-B6	S-ZPY ○ ☆ □ -B5-B8	M8x1.25	8	ZPY3-B5-B8																					
Model	A	B	L	Pad Diameter					P	Adaptor Model																																																															
				40	50																																																																				
S-ZPY ○ ☆ □ -B5-A6	M6x1.0	8	54	18.5	19.5		ZPY4-B5-A6																																																																		
S-ZPY ○ ☆ □ -B5-A8	M8x1.0	12	44				ZPY4-B5-A8																																																																		
Model	A	B	Pad Diameter		P	Adaptor Model																																																																			
			40	50																																																																					
S-ZPY ○ ☆ □ -B5-B6	M6x1.0	6	18.5	19.5		ZPY3-B5-B6																																																																			
S-ZPY ○ ☆ □ -B5-B8	M8x1.25	8				ZPY3-B5-B8																																																																			
<p>○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)</p>						<p>○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C) □ Material: NBR(N),Silicone(S)</p>																																																																			

S-ZP SERIES

Vacuum pad with lock ring U, C (ø40,ø50) With adaptor

Lateral vacuum port
with female thread

Dimensions

(mm)

Vacuum pad with lock ring U.C

S-ZPT Vertical vacuum port buffer 10,20,30,50

N6,U6

● 10 ● 20,30,50

Can be combined with connector accessories

Can be combined with connector accessories

Model	B	C	L	Pad Diameter P		Bumper Support Model
				40	50	
S - ZPT (symbols) 10-B5-A14	10		77			ZPT4- (symbols) 10-B5-A14
S - ZPT (symbols) 20-B5-A14	20	50	81	18.5	19.5	ZPT4- (symbols) 20-B5-A14
S - ZPT (symbols) 30-B5-A14	30		91			ZPT4- (symbols) 30-B5-A14
S - ZPT (symbols) 50-B5-A14	50	75	136			ZPT4- (symbols) 50-B5-A14

Model	B	C	L	Pad Diameter P		Bumper Support Model
				40	50	
S - ZPT (symbols) 10-B01-A14	10		78.5			ZPT4- (symbols) 10-B01-A14
S - ZPT (symbols) 20-B01-A14	20	50	84	18.5	19.5	ZPT4- (symbols) 20-B01-A14
S - ZPT (symbols) 30-B01-A14	30		94			ZPT4- (symbols) 30-B01-A14
S - ZPT (symbols) 50-B01-A14	50	75	139			ZPT4- (symbols) 50-B01-A14

○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C)
 □ Material: NBR(N),Silicone(S) ● Height compensator type:Rotative(J), Unable to rotate(K) ■ Buffer stroke(mm):10,20,30,50

S-ZPR Lateral vacuum port buffer

10,20,30,50

Can be combined with connector accessories

Can be combined with connector accessories

Model	B	C	L	Pad Diameter P		Bumper Support Model
				40	50	
S - ZPR (symbols) 10-◇-A14	10		80			ZPR4- (symbols) 10-◇-A14
S - ZPR (symbols) 20-◇-A14	20	50	77	18.5	19.5	ZPR4- (symbols) 20-◇-A14
S - ZPR (symbols) 30-◇-A14	30		87			ZPR4- (symbols) 30-◇-A14
S - ZPR (symbols) 50-◇-A14	50	75	132			ZPR4- (symbols) 50-◇-A14

Model	B	C	L	Pad Diameter P		Bumper Support Model
				40	50	
S - ZPY (symbols) 10-◇-A14	10		80			ZPY4- (symbols) 10-◇-A14
S - ZPY (symbols) 20-◇-A14	20	50	77	18.5	19.5	ZPY4- (symbols) 20-◇-A14
S - ZPY (symbols) 30-◇-A14	30		87			ZPY4- (symbols) 30-◇-A14
S - ZPY (symbols) 50-◇-A14	50	75	132			ZPY4- (symbols) 50-◇-A14

○ Symbol of pad diameter: 40,50 ☆ Pad type: Flat(U), with ribs(C)
 □ Material: NBR(N),Silicone(S) ● Height compensator type:Rotative(J)
 ◇ Vacuum port connection:ø6,08 Unable to rotate(K) ■ Buffer stroke(mm):10,20,30,50

A- 38

S-ZP SERIES

Vacuum pad with lock ring D (ø40) With adaptor

Dimensions

(mm)

Vacuum pad with lock ring D																																																
S-ZPT Vertical vacuum port with male thread A6,A8,A01			S-ZPT Vertical vacuum port with female thread B6,B8,B01																																													
<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>øB</th> <th>C</th> <th>L</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPT40D□-A6</td> <td>M6x1.0</td> <td>3.5</td> <td>8</td> <td>32</td> <td>ZPT4-A6</td> </tr> <tr> <td>S-ZPT40D□-A8</td> <td>M8x1.0</td> <td>4.5</td> <td>12</td> <td>22</td> <td>ZPT4-A8</td> </tr> <tr> <td>S-ZPT40D□-A01</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>ZPT4-A01</td> </tr> </tbody> </table>			Model	A	øB	C	L	Adaptor Model	S-ZPT40D□-A6	M6x1.0	3.5	8	32	ZPT4-A6	S-ZPT40D□-A8	M8x1.0	4.5	12	22	ZPT4-A8	S-ZPT40D□-A01	-	-	-	-	ZPT4-A01	<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>B</th> <th>øC</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPT40D□-B6</td> <td>M6x1.0</td> <td>6</td> <td>4.5</td> <td>ZPT4-B6</td> </tr> <tr> <td>S-ZPT40D□-B8</td> <td>M8x1.25</td> <td>8</td> <td rowspan="2">6.8</td> <td>ZPT4-B8</td> </tr> <tr> <td>S-ZPT40D□-B01</td> <td>Rc1/8</td> <td>6.2</td> <td>ZPT4-B01</td> </tr> </tbody> </table>			Model	A	B	øC	Adaptor Model	S-ZPT40D□-B6	M6x1.0	6	4.5	ZPT4-B6	S-ZPT40D□-B8	M8x1.25	8	6.8	ZPT4-B8	S-ZPT40D□-B01	Rc1/8	6.2	ZPT4-B01
Model	A	øB	C	L	Adaptor Model																																											
S-ZPT40D□-A6	M6x1.0	3.5	8	32	ZPT4-A6																																											
S-ZPT40D□-A8	M8x1.0	4.5	12	22	ZPT4-A8																																											
S-ZPT40D□-A01	-	-	-	-	ZPT4-A01																																											
Model	A	B	øC	Adaptor Model																																												
S-ZPT40D□-B6	M6x1.0	6	4.5	ZPT4-B6																																												
S-ZPT40D□-B8	M8x1.25	8	6.8	ZPT4-B8																																												
S-ZPT40D□-B01	Rc1/8	6.2		ZPT4-B01																																												
□ Material: NBR(N),Silicone(S)			□ Material: NBR(N),Silicone(S)																																													
S-ZPR Lateral vacuum port with female thread A6,A8			S-ZPR Lateral vacuum port with female thread B6,B8																																													
<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>E</th> <th>L</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPR40D□-◇-A6</td> <td>M6x1.0</td> <td>8</td> <td>68</td> <td>ZPR4-◇-A6</td> </tr> <tr> <td>S-ZPR40D□-◇-A8</td> <td>M8x1.0</td> <td>12</td> <td>58</td> <td>ZPR4-◇-A8</td> </tr> </tbody> </table>			Model	A	E	L	Adaptor Model	S-ZPR40D□-◇-A6	M6x1.0	8	68	ZPR4-◇-A6	S-ZPR40D□-◇-A8	M8x1.0	12	58	ZPR4-◇-A8	<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>D</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPR40D□-◇-B6</td> <td>M6x1.0</td> <td>6</td> <td>ZPR4-◇-B6</td> </tr> <tr> <td>S-ZPR40D□-◇-B8</td> <td>M8x1.25</td> <td>8</td> <td>ZPR4-◇-B8</td> </tr> </tbody> </table>			Model	A	D	Adaptor Model	S-ZPR40D□-◇-B6	M6x1.0	6	ZPR4-◇-B6	S-ZPR40D□-◇-B8	M8x1.25	8	ZPR4-◇-B8																
Model	A	E	L	Adaptor Model																																												
S-ZPR40D□-◇-A6	M6x1.0	8	68	ZPR4-◇-A6																																												
S-ZPR40D□-◇-A8	M8x1.0	12	58	ZPR4-◇-A8																																												
Model	A	D	Adaptor Model																																													
S-ZPR40D□-◇-B6	M6x1.0	6	ZPR4-◇-B6																																													
S-ZPR40D□-◇-B8	M8x1.25	8	ZPR4-◇-B8																																													
□ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 06,08			□ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 06,08																																													
S-ZPY Lateral vacuum port with female thread A6,A8			S-ZPY Lateral vacuum port with female thread B6,B8																																													
<p>Can be combined with connector accessories</p> <ul style="list-style-type: none"> Q Connector accessories a3 M5 ◇ U6,N6 Q Connector accessories a5 M5 ◇ 06 Q Connector accessories a6 M5 ◇ 06S <p>Model: S-ZPY40D□-◇-A⁶₈</p>			<p>Can be combined with connector accessories</p> <ul style="list-style-type: none"> Q Connector accessories a3 M5 ◇ U6,N6 Q Connector accessories a5 M5 ◇ 06 Q Connector accessories a6 M5 ◇ 06S <p>Model: S-ZPY40D□-◇-B⁶₈</p>																																													
<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>B</th> <th>L</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPY40D□-B5-A6</td> <td>M6x1.0</td> <td>8</td> <td>54</td> <td>ZPY4-B5-A6</td> </tr> <tr> <td>S-ZPY40D□-B5-A8</td> <td>M8x1.0</td> <td>12</td> <td>44</td> <td>ZPY4-B5-A8</td> </tr> </tbody> </table>			Model	A	B	L	Adaptor Model	S-ZPY40D□-B5-A6	M6x1.0	8	54	ZPY4-B5-A6	S-ZPY40D□-B5-A8	M8x1.0	12	44	ZPY4-B5-A8	<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>B</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPY40D□-B5-B6</td> <td>M6x1.0</td> <td>6</td> <td>ZPY3-B5-B6</td> </tr> <tr> <td>S-ZPY40D□-B5-B8</td> <td>M8x1.25</td> <td>8</td> <td>ZPY3-B5-B8</td> </tr> </tbody> </table>			Model	A	B	Adaptor Model	S-ZPY40D□-B5-B6	M6x1.0	6	ZPY3-B5-B6	S-ZPY40D□-B5-B8	M8x1.25	8	ZPY3-B5-B8																
Model	A	B	L	Adaptor Model																																												
S-ZPY40D□-B5-A6	M6x1.0	8	54	ZPY4-B5-A6																																												
S-ZPY40D□-B5-A8	M8x1.0	12	44	ZPY4-B5-A8																																												
Model	A	B	Adaptor Model																																													
S-ZPY40D□-B5-B6	M6x1.0	6	ZPY3-B5-B6																																													
S-ZPY40D□-B5-B8	M8x1.25	8	ZPY3-B5-B8																																													
□ Material: NBR(N),Silicone(S)			□ Material: NBR(N),Silicone(S)																																													