

S-ZP SERIES

Vacuum pad with lock ring D (ø10, ø16) With adaptor

Dimensions

(mm)

Vacuum pad with lock ring D															
S-ZPT Vertical vacuum port with male thread		A5,A6,A01								S-ZPT Vertical vacuum port with female thread		B5,B6,B01			
A5,A6		A01								B5,B6		B01			
Model	A	B	C	L	Pad diameter		P	Adaptor Model							
					10	16			10	16	Adaptor Model				
S-ZPT ○ D □ -A5	M5x0.8	7	4	26	15	16	16	ZPT2-A5							
S-ZPT ○ D □ -A6	M6x1.0	8	3	31				ZPT2-A6							
S-ZPT ○ D □ -A01	-	-	-	-				ZPT2-A01							
○ Symbol of pad diameter: 10,16 □ Material: NBR(N),Silicone(S)															
S-ZPR Lateral vacuum port with female thread		A5,A6								S-ZPR Lateral vacuum port with female thread		B5,B6			
Model	A	D	E	L	Pad Diameter		P	Adaptor Model							
					10	16			10	16	Adaptor Model				
S-ZPR ○ D □ -◇ -A5	M5x0.8	4	7	55	15	16	16	ZPR2-◇ -A5							
S-ZPR ○ D □ -◇ -A6	M6x1.0	3	8	60				ZPR2-◇ -A6							
S-ZPR ○ D □ -◇ -B5	M5x0.8	5						ZPR2-◇ -B5							
S-ZPR ○ D □ -◇ -B6	M6x1.0	6			ZPR2-◇ -B6										
○ Symbol of pad diameter: 10,16 □ Material: NBR(N),Silicone(S)															
◇ Vacuum port connection: 04,06															
S-ZPY Lateral vacuum port with female thread		A5,A6		Can be combined with connector accessories						S-ZPY Lateral vacuum port with female thread		B5,B6			
				Model: S-ZPY ○ D □ -◇ -A₅₆											
				Model: S-ZPY ○ D □ -◇ -B₅₆											
Model	A	B	C	L	Pad Diameter		P	Adaptor Model							
					10	16			10	16	Adaptor Model				
S-ZPY ○ D □ -B5-A5	M5x0.8	7	4	47	15	16	16	ZPY2-B5-A5							
S-ZPY ○ D □ -B5-A6	M6x1.0	8	3	52				ZPY2-B5-A6							
S-ZPY ○ D □ -B5-B5	M5x0.8	5						ZPY2-B5-B5							
S-ZPY ○ D □ -B5-B6	M6x1.0	6			ZPY2-B5-B6										
○ Symbol of pad diameter: 10,16 □ Material: NBR(N),Silicone(S)															
○ Symbol of pad diameter: 10,16 □ Material: NBR(N),Silicone(S)															

S-ZP SERIES

Vacuum pad with lock ring D (ø10, ø16) With adaptor

Dimensions


(mm)

Vacuum pad with lock ring D

S-ZPT Vertical vacuum port buffer 10,20,30,40,50


Rotative type:

S-ZPT ○ D □ J ■ -B5-A10




Unable to rotate type:

S-ZPT ○ D □ K ■ -B5-A10




Can be combined with connector accessories



Model: S-ZPT ○ D □ ● ■ -◇ -A10

N4, U4

N6, U6




Model: S-ZPT ○ D □ ● ■ -◇ -A10
N4
U4
N6
U6

Model	B	C	L	Pad Diameter		P	(m1) + (i2) Bumper Support Model
				10	16		
S-ZPT ○ D □ J10-B5-A10	10	23	47	15	16		ZPT2-J10-B5-A10
S-ZPT ○ D □ J20-B5-A10	20	51	85				ZPT2-J20-B5-A10
S-ZPT ○ D □ J30-B5-A10	30	95	131				ZPT2-J30-B5-A10
S-ZPT ○ D □ J40-B5-A10	40	131	141				ZPT2-J40-B5-A10
S-ZPT ○ D □ J50-B5-A10	50	141					ZPT3-J50-B5-A10

Model	B	C	L	Pad Diameter		P	(m1) + (i2) Bumper Support Model
				10	16		
S-ZPT ○ D □ K10-B5-A10	10	23	47	15	16		ZPT2-K10-B5-A10
S-ZPT ○ D □ K20-B5-A10	20	51	85				ZPT2-K20-B5-A10
S-ZPT ○ D □ K30-B5-A10	30	95	131				ZPT2-K30-B5-A10
S-ZPT ○ D □ K40-B5-A10	40	131	141				ZPT2-K40-B5-A10
S-ZPT ○ D □ K50-B5-A10	50	141					ZPT3-K50-B5-A10

○ Symbol of pad diameter: 10, 16 □ Material: NBR(N), Silicone(S) ■ Buffer stroke(mm): 10, 20, 30, 40, 50
● Height compensator type: Rotative(J), Unable to rotate(K)


S-ZPR Lateral vacuum port buffer 10,20,30,40,50

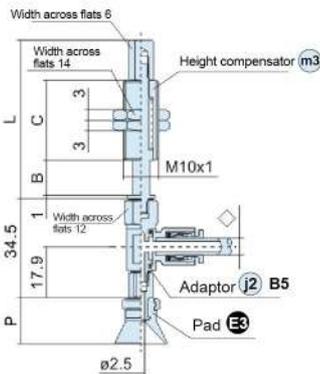

Model	B	C	L	Pad Diameter		P	(m3) + (j2) Bumper Support Model
				10	16		
S-ZPR ○ D □ ● 10-◇ -A10	10	23	45	15	16		ZPR2-●10-◇ -A10
S-ZPR ○ D □ ● 20-◇ -A10	20	51	83				ZPR2-●20-◇ -A10
S-ZPR ○ D □ ● 30-◇ -A10	30	93	129				ZPR2-●30-◇ -A10
S-ZPR ○ D □ ● 40-◇ -A10	40	129	139				ZPR2-●40-◇ -A10
S-ZPR ○ D □ ● 50-◇ -A10	50	139					ZPR2-●50-◇ -A10

○ Symbol of pad diameter: 10, 16 □ Material: NBR(N), Silicone(S)
◇ Vacuum port connection: 04, 06 ● Height compensator type: Rotative(J)
Unable to rotate(K)


S-ZPY Lateral vacuum port buffer 10,20,30,40,50

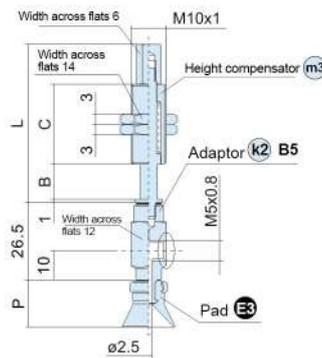

Model	B	C	L	Pad Diameter		P	(m3) + (j2) Bumper Support Model
				10	16		
S-ZPY ○ D □ ● 10-B5-A10	10	23	45	15	16		ZPY2-●10-B5-A10
S-ZPY ○ D □ ● 20-B5-A10	20	51	83				ZPY2-●20-B5-A10
S-ZPY ○ D □ ● 30-B5-A10	30	93	129				ZPY2-●30-B5-A10
S-ZPY ○ D □ ● 40-B5-A10	40	129	139				ZPY2-●40-B5-A10
S-ZPY ○ D □ ● 50-B5-A10	50	139					ZPY2-●50-B5-A10

○ Symbol of pad diameter: 10, 16 □ Material: NBR(N), Silicone(S)
■ Buffer stroke(mm): 10, 20, 30, 40, 50 ● Height compensator type: Rotative(J)
Unable to rotate(K)

Can be combined with connector accessories



Model: S-ZPY ○ D □ ● ■ -◇ -A10

S-ZP SERIES

Vacuum pad with lock ring

D (ø25)
With adaptor

Dimensions

(mm)

Vacuum pad with lock ring D																																																						
S-ZPT Vertical vacuum port with male thread A6,A8,A01		S-ZPT Vertical vacuum port with female thread B5,B6,B8,B01																																																				
<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th>L</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPT25D□-A6</td> <td>M6x1.0</td> <td>5</td> <td>8</td> <td>8</td> <td>31</td> <td>ZPT3-A6</td> </tr> <tr> <td>S-ZPT25D□-A8</td> <td>M8x1.0</td> <td>10</td> <td>12</td> <td>12</td> <td>26</td> <td>ZPT3-A8</td> </tr> <tr> <td>S-ZPT25D□-A01</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>ZPT3-A01</td> </tr> </tbody> </table>		Model	A	B	C	D	L	Adaptor Model	S-ZPT25D□-A6	M6x1.0	5	8	8	31	ZPT3-A6	S-ZPT25D□-A8	M8x1.0	10	12	12	26	ZPT3-A8	S-ZPT25D□-A01	-	-	-	-	-	ZPT3-A01	<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>B</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPT25D□-B5</td> <td>M5x0.8</td> <td>5</td> <td>ZPT3-B5</td> </tr> <tr> <td>S-ZPT25D□-B6</td> <td>M6x1.0</td> <td>6</td> <td>ZPT3-B6</td> </tr> <tr> <td>S-ZPT25D□-B8</td> <td>M8x1.25</td> <td>8</td> <td>ZPT3-B8</td> </tr> <tr> <td>S-ZPT25D□-B01</td> <td>Rc1/8</td> <td>6.2</td> <td>ZPT3-B01</td> </tr> </tbody> </table>					Model	A	B	Adaptor Model	S-ZPT25D□-B5	M5x0.8	5	ZPT3-B5	S-ZPT25D□-B6	M6x1.0	6	ZPT3-B6	S-ZPT25D□-B8	M8x1.25	8	ZPT3-B8	S-ZPT25D□-B01	Rc1/8	6.2	ZPT3-B01
Model	A	B	C	D	L	Adaptor Model																																																
S-ZPT25D□-A6	M6x1.0	5	8	8	31	ZPT3-A6																																																
S-ZPT25D□-A8	M8x1.0	10	12	12	26	ZPT3-A8																																																
S-ZPT25D□-A01	-	-	-	-	-	ZPT3-A01																																																
Model	A	B	Adaptor Model																																																			
S-ZPT25D□-B5	M5x0.8	5	ZPT3-B5																																																			
S-ZPT25D□-B6	M6x1.0	6	ZPT3-B6																																																			
S-ZPT25D□-B8	M8x1.25	8	ZPT3-B8																																																			
S-ZPT25D□-B01	Rc1/8	6.2	ZPT3-B01																																																			
□ Material: NBR(N),Silicone(S)		□ Material: NBR(N),Silicone(S)																																																				
S-ZPR Lateral vacuum port with female thread A6,A8		S-ZPR Lateral vacuum port with female thread B5,B6,B8																																																				
<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>E</th> <th>L</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPR25D□-◇-A6</td> <td>M6x1.0</td> <td>8</td> <td>69.5</td> <td>ZPR3-◇-A6</td> </tr> <tr> <td>S-ZPR25D□-◇-A8</td> <td>M8x1.0</td> <td>12</td> <td>59.5</td> <td>ZPR3-◇-A8</td> </tr> </tbody> </table>		Model	A	E	L	Adaptor Model	S-ZPR25D□-◇-A6	M6x1.0	8	69.5	ZPR3-◇-A6	S-ZPR25D□-◇-A8	M8x1.0	12	59.5	ZPR3-◇-A8	<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>D</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPR25D□-◇-B5</td> <td>M5x0.8</td> <td>5</td> <td>ZPR3-◇-B5</td> </tr> <tr> <td>S-ZPR25D□-◇-B6</td> <td>M6x1.0</td> <td>6</td> <td>ZPR3-◇-B6</td> </tr> <tr> <td>S-ZPR25D□-◇-B8</td> <td>M8x1.25</td> <td>8</td> <td>ZPR3-◇-B8</td> </tr> </tbody> </table>					Model	A	D	Adaptor Model	S-ZPR25D□-◇-B5	M5x0.8	5	ZPR3-◇-B5	S-ZPR25D□-◇-B6	M6x1.0	6	ZPR3-◇-B6	S-ZPR25D□-◇-B8	M8x1.25	8	ZPR3-◇-B8																	
Model	A	E	L	Adaptor Model																																																		
S-ZPR25D□-◇-A6	M6x1.0	8	69.5	ZPR3-◇-A6																																																		
S-ZPR25D□-◇-A8	M8x1.0	12	59.5	ZPR3-◇-A8																																																		
Model	A	D	Adaptor Model																																																			
S-ZPR25D□-◇-B5	M5x0.8	5	ZPR3-◇-B5																																																			
S-ZPR25D□-◇-B6	M6x1.0	6	ZPR3-◇-B6																																																			
S-ZPR25D□-◇-B8	M8x1.25	8	ZPR3-◇-B8																																																			
□ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 04,06,08		□ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 04,06,08																																																				
S-ZPY Lateral vacuum port with female thread A6,A8		S-ZPY Lateral vacuum port with female thread B5,B6,B8																																																				
<p>Can be combined with connector accessories</p> <ul style="list-style-type: none"> Connector accessories (a3) M5 ◇ U4,N4,U6,N6 Connector accessories (a5) M5 ◇ 04,06 Connector accessories (a6) M5 ◇ 04S,06S <p>Model: S-ZPY25D□-◇-A₆⁶₈</p>		<p>Can be combined with connector accessories</p> <ul style="list-style-type: none"> Connector accessories (a3) M5 ◇ U4,N4,U6,N6 Connector accessories (a5) M5 ◇ 04,06 Connector accessories (a6) M5 ◇ 04S,06S <p>Model: S-ZPY25D□-◇-B₅⁵₆₈</p>																																																				
<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>B</th> <th>L</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPY25D□-B5-A6</td> <td>M6x1.0</td> <td>8</td> <td>54</td> <td>ZPY3-B5-A6</td> </tr> <tr> <td>S-ZPY25D□-B5-A8</td> <td>M8x1.0</td> <td>12</td> <td>44</td> <td>ZPY3-B5-A8</td> </tr> </tbody> </table>		Model	A	B	L	Adaptor Model	S-ZPY25D□-B5-A6	M6x1.0	8	54	ZPY3-B5-A6	S-ZPY25D□-B5-A8	M8x1.0	12	44	ZPY3-B5-A8	<table border="1"> <thead> <tr> <th>Model</th> <th>A</th> <th>B</th> <th>Adaptor Model</th> </tr> </thead> <tbody> <tr> <td>S-ZPY25D□-B5-B5</td> <td>M5x0.8</td> <td>5</td> <td>ZPY3-B5-B5</td> </tr> <tr> <td>S-ZPY25D□-B5-B6</td> <td>M6x1.0</td> <td>6</td> <td>ZPY3-B5-B6</td> </tr> <tr> <td>S-ZPY25D□-B5-B8</td> <td>M8x1.25</td> <td>8</td> <td>ZPY3-B5-B8</td> </tr> </tbody> </table>					Model	A	B	Adaptor Model	S-ZPY25D□-B5-B5	M5x0.8	5	ZPY3-B5-B5	S-ZPY25D□-B5-B6	M6x1.0	6	ZPY3-B5-B6	S-ZPY25D□-B5-B8	M8x1.25	8	ZPY3-B5-B8																	
Model	A	B	L	Adaptor Model																																																		
S-ZPY25D□-B5-A6	M6x1.0	8	54	ZPY3-B5-A6																																																		
S-ZPY25D□-B5-A8	M8x1.0	12	44	ZPY3-B5-A8																																																		
Model	A	B	Adaptor Model																																																			
S-ZPY25D□-B5-B5	M5x0.8	5	ZPY3-B5-B5																																																			
S-ZPY25D□-B5-B6	M6x1.0	6	ZPY3-B5-B6																																																			
S-ZPY25D□-B5-B8	M8x1.25	8	ZPY3-B5-B8																																																			
□ Material: NBR(N),Silicone(S)		□ Material: NBR(N),Silicone(S)																																																				

S-ZP SERIES

Vacuum pad with lock ring D (ø25) With adaptor

Dimensions

(mm)

Vacuum pad with lock ring D

S-ZPT Vertical vacuum port buffer 10,20,30,40,50 A10

Can be combined with connector accessories

Connector accessories (a5) M5
◇ 03,23,04,06

Connector accessories (a6) M5
◇ 03S,23S,04S,06S

Model : S-ZPT25D □ ● ■ - ◇ - A10

N4,U4 N6,U6

N4:ø2.8 U4:ø3.4 N6:ø4.5 U6:ø4.9

Model : S-ZPT25D □ ● ■ - A10 N4 U4 N6 U6

S-ZPT Vertical vacuum port buffer

10,20,30,50 A14

Can be combined with connector accessories

Connector accessories (h3) ◇ 06,08

Connector accessories (h4) ◇ 06S,08S

Model : S-ZPT25D □ ● ■ - ◇ - A14

N6,U6

● 10 ● 20,30,50

N6:ø4.5 U6:ø4.9

Model : S-ZPT25D □ ● ■ - N6-U6 - A14

Model	B	C	L	(m1) + (i4) Bumper Support Model
S - ZPT25D □ ● 10-B5-A10	10	23	47	ZPT3-● 10-B5-A10
S - ZPT25D □ ● 20-B5-A10	20	51	85	ZPT3-● 20-B5-A10
S - ZPT25D □ ● 30-B5-A10	30		95	ZPT3-● 30-B5-A10
S - ZPT25D □ ● 40-B5-A10	40	77	131	ZPT3-● 40-B5-A10
S - ZPT25D □ ● 50-B5-A10	50		141	ZPT3-● 50-B5-A10

□ Material: NBR(N),Silicone(S) ● Height compensator type:Rotative(J) Unable to rotate(K)
■ Buffer stroke(mm):10,20,30,40,50

S-ZPR Lateral vacuum port buffer

10,20,30,40,50 A10

Special combination

Buffer 10,20,30,50 A14

Height compensator (m4)

Adaptor (j4) B8

Model : S-ZPR25D □ ● ■ - ◇ - A14

S-ZPY Lateral vacuum port buffer

10,20,30,40,50

Can be combined with connector accessories

Connector accessories (a3) M5
◇ U4,N4,U6,N6

Connector accessories (a5) M5
◇ 03,23,04,06

Connector accessories (a6) M5
◇ 03S,23S,04S,06S

Model : S-ZPY25D □ ● ■ - ◇ - A10

Special combination

Buffer 10,20,30,50 A14

Height compensator (m4)
+ Adaptor (j4) B8
+ Pad (F3)

Model : S-ZPY25D □ ● ■ - ◇ - A14

S-ZPY Lateral vacuum port buffer

10,20,30,40,50

Can be combined with connector accessories

Connector accessories (a3) M5
◇ U4,N4,U6,N6

Connector accessories (a5) M5
◇ 03,23,04,06

Connector accessories (a6) M5
◇ 03S,23S,04S,06S

Model : S-ZPY25D □ ● ■ - ◇ - A10

Special combination

Buffer 10,20,30,50 A14

Height compensator (m4)
+ Adaptor (j4) B8
+ Pad (F3)

Model : S-ZPY25D □ ● ■ - ◇ - A14

S-ZPY Lateral vacuum port buffer

10,20,30,40,50

Can be combined with connector accessories

Connector accessories (a3) M5
◇ U4,N4,U6,N6

Connector accessories (a5) M5
◇ 03,23,04,06

Connector accessories (a6) M5
◇ 03S,23S,04S,06S

Model : S-ZPY25D □ ● ■ - ◇ - A10

Special combination

Buffer 10,20,30,50 A14

Height compensator (m4)
+ Adaptor (j4) B8
+ Pad (F3)

Model : S-ZPY25D □ ● ■ - ◇ - A14

S-ZP SERIES

Vacuum pad with lock ring D (ø40) With adaptor

Dimensions

(mm)

Vacuum pad with lock ring D					
S-ZPT Vertical vacuum port with male thread A6,A8,A01			S-ZPT Vertical vacuum port with female thread B6,B8,B01		
Model	A	øB	C	L	Adaptor Model
S-ZPT40D□-A6	M6x1.0	3.5	8	32	ZPT4-A6
S-ZPT40D□-A8	M8x1.0	4.5	12	22	ZPT4-A8
S-ZPT40D□-A01	-	-	-	-	ZPT4-A01
□ Material: NBR(N),Silicone(S)					
S-ZPR Lateral vacuum port with female thread A6,A8			S-ZPR Lateral vacuum port with female thread B6,B8		
Model	A	E	L	Adaptor Model	
S-ZPR40D□-◇-A6	M6x1.0	8	68	ZPR4-◇-A6	
S-ZPR40D□-◇-A8	M8x1.0	12	58	ZPR4-◇-A8	
□ Material: NBR(N),Silicone(S) ◇ Vacuum port connection: 06,08					
S-ZPY Lateral vacuum port with female thread A6,A8			S-ZPY Lateral vacuum port with female thread B6,B8		
Can be combined with connector accessories Q Connector accessories (a3) M5 ◇ U6,N6 Q Connector accessories (a5) M5 ◇ 06 Q Connector accessories (a6) M5 ◇ 06S Model : S-ZPY40D□-◇-A⁶			Can be combined with connector accessories Q Connector accessories (a3) M5 ◇ U6,N6 Q Connector accessories (a5) M5 ◇ 06 Q Connector accessories (a6) M5 ◇ 06S Model : S-ZPY40D□-◇-B⁶		
Model	A	B	L	Adaptor Model	
S-ZPY40D□-B5-A6	M6x1.0	8	54	ZPY4-B5-A6	
S-ZPY40D□-B5-A8	M8x1.0	12	44	ZPY4-B5-A8	
□ Material: NBR(N),Silicone(S)					
Can be combined with connector accessories Q Connector accessories (a3) M5 ◇ U6,N6 Q Connector accessories (a5) M5 ◇ 06 Q Connector accessories (a6) M5 ◇ 06S Model : S-ZPY40D□-◇-B⁶			Can be combined with connector accessories Q Connector accessories (a3) M5 ◇ U6,N6 Q Connector accessories (a5) M5 ◇ 06 Q Connector accessories (a6) M5 ◇ 06S Model : S-ZPY40D□-◇-B⁶		
Model	A	B	Adaptor Model		
S-ZPY40D□-B5-B6	M6x1.0	6	ZPY3-B5-B6		
S-ZPY40D□-B5-B8	M8x1.25	8	ZPY3-B5-B8		
□ Material: NBR(N),Silicone(S)					

S-ZP SERIES

Vacuum pad with lock ring D (ø40) With adaptor

Dimensions

(mm)

Vacuum pad with lock ring D

S-ZPT Vertical vacuum port buffer 10,20,30,50

N6,U6

● 10 ● 20,30,50

N6:ø4.5
U6:ø4.9

C 12

Model :
S-ZPT40D □ ● ■ - N6 U6 - A14

B01

Can be combined with connector accessories

Connector accessories (h3) ◇ 06,08

Connector accessories (h4) ◇ 06S,08S

Model :
S-ZPT40D □ ● ■ - ◇ - A14

Model	B	C	L	(m2) + (i6) Bumper Support Model
S-ZPT40D □ ● 10-B5-A14	10	50	77	ZPT4-● 10-B5-A14
S-ZPT40D □ ● 20-B5-A14	20		81	ZPT4-● 20-B5-A14
S-ZPT40D □ ● 30-B5-A14	30		91	ZPT4-● 30-B5-A14
S-ZPT40D □ ● 50-B5-A14	50		136	ZPT4-● 50-B5-A14

Model	B	C	L	(m2) + (i6) Bumper Support Model
S-ZPT40D □ ● 10-B01-A14	10	50	78.5	ZPT4-● 10-B01-A14
S-ZPT40D □ ● 20-B01-A14	20		84	ZPT4-● 20-B01-A14
S-ZPT40D □ ● 30-B01-A14	30		94	ZPT4-● 30-B01-A14
S-ZPT40D □ ● 50-B01-A14	50		139	ZPT4-● 50-B01-A14

□ Material: NBR(N),Silicone(S) ● Height compensator type:Rotative(J), Unable to rotate(K) ■ Buffer stroke(mm):10,20,30,50

S-ZPR Lateral vacuum port buffer

10,20,30,50

Can be combined with connector accessories

Connector accessories (a3) M5 ◇ U6,N6

Connector accessories (a5) M5 ◇ 06

Connector accessories (a6) M5 ◇ 06S

Model :
S-ZPY40D □ ● ■ ◇ - A14

Model	B	C	L	(m4) + (j6) Bumper Support Model
S-ZPR40D □ ● 10-◇ - A14	10	50	80	ZPR4-● 10-◇ - A14
S-ZPR40D □ ● 20-◇ - A14	20		77	ZPR4-● 20-◇ - A14
S-ZPR40D □ ● 30-◇ - A14	30		87	ZPR4-● 30-◇ - A14
S-ZPR40D □ ● 50-◇ - A14	50		132	ZPR4-● 50-◇ - A14

Model	B	C	L	(m4) + (k6) Bumper Support Model
S-ZPY40D □ ● 10-◇ - A14	10	50	80	ZPY4-● 10-◇ - A14
S-ZPY40D □ ● 20-◇ - A14	20		77	ZPY4-● 20-◇ - A14
S-ZPY40D □ ● 30-◇ - A14	30		87	ZPY4-● 30-◇ - A14
S-ZPY40D □ ● 50-◇ - A14	50		132	ZPY4-● 50-◇ - A14